



## END SI ECTION OF BRIDGE SHOWING PRECAST DETAILS

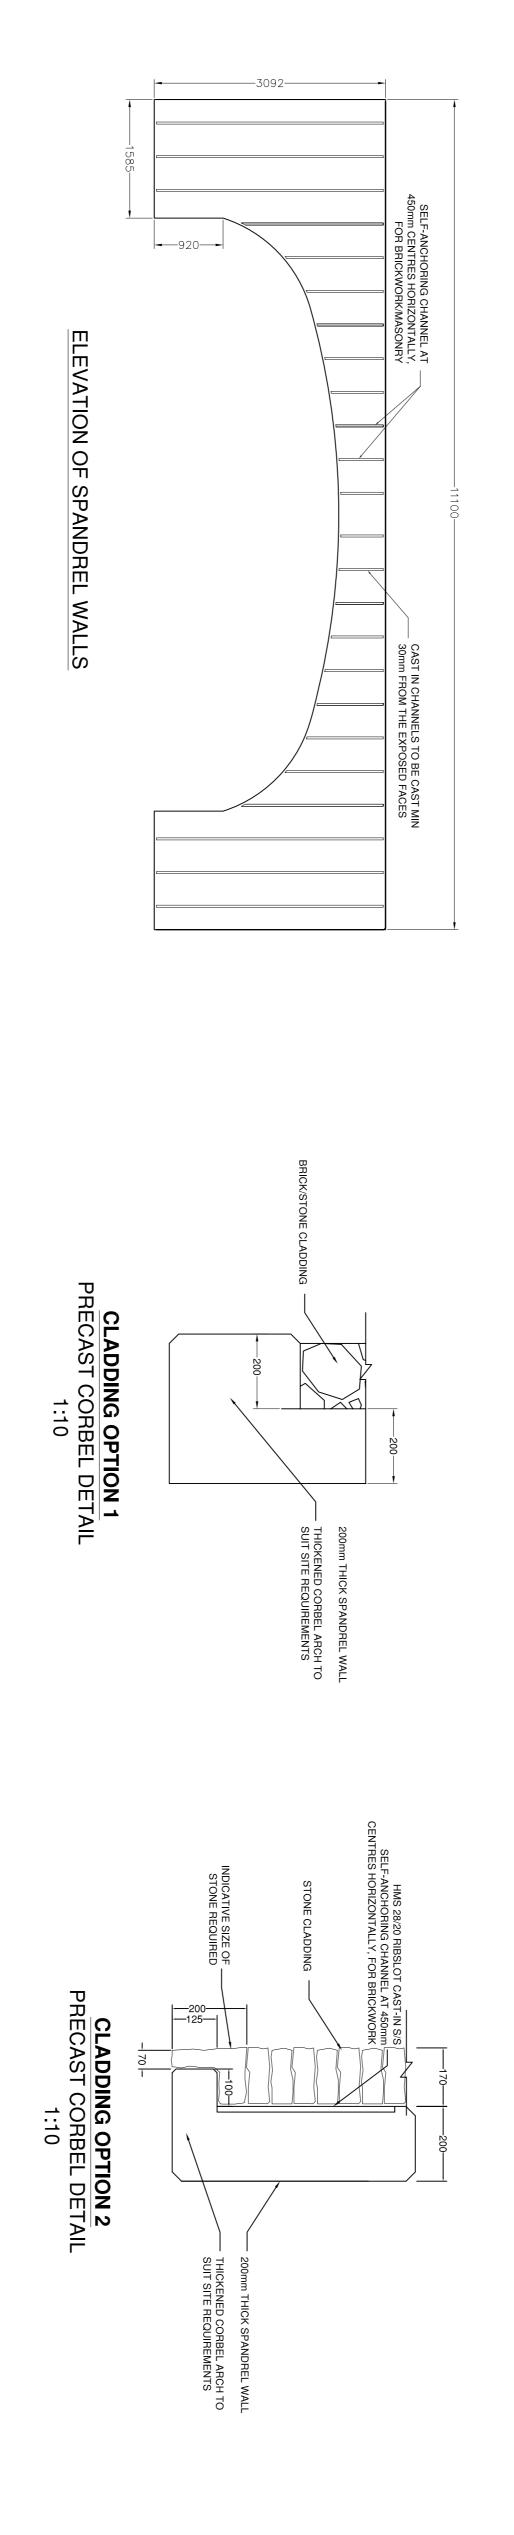

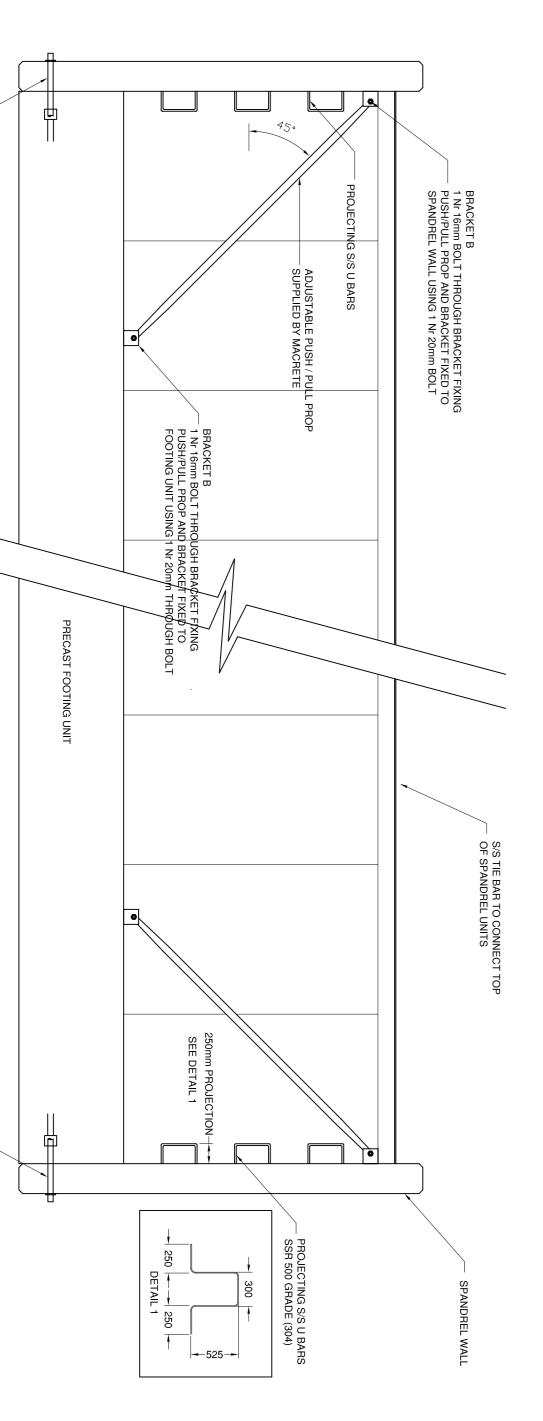

## SIDE ELEVATION SHOWING SPANDREL WALL CONNECTIONS NTS

TIE BAR EXTERNAL FIXING WITH CAST IN RMD RAPID ANCHORS

TIE BAR EXTERNAL FIXING WITH CAST IN RMD COUPLER

NOTES

- Ņ

ω

- o 5 4

- 9 œ
- 10.
- stated and levels are in metres to an arbitrary datum. This drawing is to be read in conjunction with all other drawings and standard documentation.

  C40/50 concrete mix (CIIB-V) as per BS 8500-1:2006 for all precast units

  Chamfers around voussoirs to be 15mm and remainder of precast units to have chamfer of 25mm

  Surface finish on exposed faces of flexiarch units=F3

  Surface finish on top of FlexiArch unit and to base of cill = U2 Top surface of cill is also to be left roughened

  Nominal cover to Reinforcement 60mm + 5mm unless noted otherwise

  S/S Projected U bars to be cast into back of spandrel wall units to tie into backfill concrete.

  Bridge deck waterproofing and workmanship to comply with SHW Series 2003 and 2005.

  Steel floated (U4) finish required to top of C20/25 infill concrete to take waterproofing.

  SN Concrete with 1800kg/m3 density can be achieved using a combination of cement, sand and a highly air-entrained chemical mixture. The following guideline mix can be used.

Concrete Sand (0/4) CEM I Water Foaming agent Hardened density in region of 1800Kg/m3 4-8 N strength (28 days) 1350 Kg 250 Kg 200 L 5L per 6m3 load (Larflow FC or similar)

- Concrete infill should be completed as per Macrete's Guidance Notes.
- Prior to any excavation, the contractor should consider propping the existing bridge to revent movement during the works.
   Great care is required when excavating close to the existing foundation in order to prevent scour or loss of soil from below it. If this occurs concrete should be placed in any void formed.
   A series of plate bearing tests should be carried out during the foundation works to confirm the allowable bearing capacity of the soils.
   Non-Shrinkable cementitious grout of min

4.

<u>;</u>

12

15.

- 50N/mm2 compressive strength to be used to fill the dowel holes and the gap between the cill units/spandrel walls and foundation. 24hrs to be allowed for grout to set before placement of arch units.

  7. All stainless steel to BS EN 10088-3 Grade 1.4436. EN Standard steel name' X3CrNiMo17-13-3



SO CREAGH ROAD TOOMEBRIDGE CO. ANTRIM BT41 3SE TEL (028) 706 50471 544 50684	REVISION DETAILS
ND	BY
8/2 [ ]	DTE
engin Soo	AMENDMENT

	• •	ı
DETAILS OF FLEXIARCH BRIDGE UNITS		

MELKSHAM LINK - SEMINGTON BRIDGE

ר ה אורט סר האורט		מבן אובט טו דב באואה כון מחומפר טווווס	2
SCALE:	DATE:	DRAWN:	CHECKED:
<b>@A1</b> 1/50 U.N.O.	09/02/12	DWC	I
DRAWING No.			REVISION NO.

MACRETE/MELKSHAM LINK/06 REVISION NO.